



COILS 30 mm x Ø 13 mm for Solenoid valves Explosion proof - Atex Ex d



BDV08012CS
÷
BDV08230CS

COIL **BDV** Coil housing material: PET - Black polyethylene - class H (180°C)

Winding: In class H

Electrical connections: With connector EN 175301-803 paragraph 5.3.1
Protection degree IP 65 EN 60529 (DIN 40050)

COIL HOUSING AND COIL FORMER MATERIAL ARE MADE BY 100% VIRGIN MATERIAL.

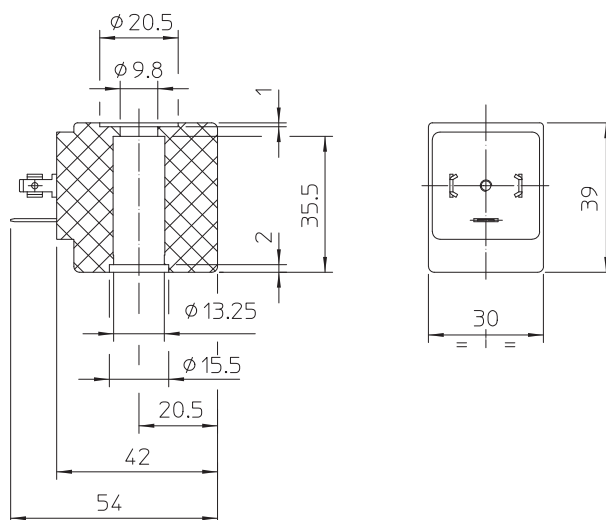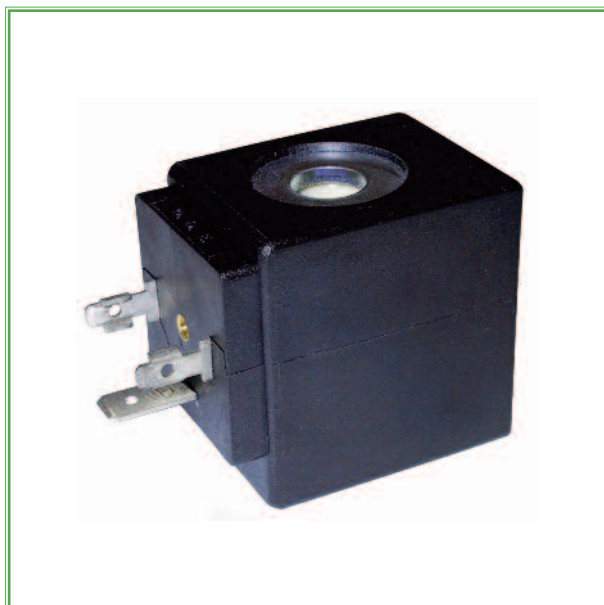

MATERIAL ON STOCK:

Code	Power	Voltages Frequency	ED	Ambient temperature	Approvals
BDV08012CS	8 W	12 ~	100%	- 40°C + 60°C	CE
BDV08012CY	11 W	12 ~	100%	- 40°C + 60°C	CE - UL - CSA - VDE
BDV08024CS	8 W	24 ~	100%	- 40°C + 60°C	CE
BDV08024CY	11 W	24 ~	100%	- 40°C + 60°C	CE - UL - CSA - VDE
BDV08024DS	14,5 VA	24 ~ 50/60	100%	- 40°C + 60°C	CE
BDV08024DY	17 VA	24 ~ 50/60	100%	- 40°C + 60°C	CE - UL - CSA - VDE
BDV08048CS	8 W	48 ~	100%	- 40°C + 60°C	CE
BDV08048DS	14,5 VA	48 ~ 50/60	100%	- 40°C + 60°C	CE
BDV08110AS	14,5 VA	110 ~ 50 120 ~ 60	100%	- 40°C + 60°C	CE
BDV08110AY	15 VA	110 ~ 50 120 ~ 60	100%	- 40°C + 60°C	CE - UL - CSA - VDE
BDV08110CS	8 W	110 ~	100%	- 40°C + 60°C	CE

The "ODE " reserves the right to carry out technical and aesthetic modifications without prior notice.

BDV08012CS
÷
BDV08230CS



Code	Power	Voltages Frequency	ED	Ambient temperature	Approvals
BDV08230AS	14,5 VA	230 ~ 50 240 ~ 60	100%	- 40°C + 60°C	CE
BDV08230AY	16 VA	230 ~ 50 240 ~ 60	100%	- 40°C + 60°C	CE - UL - CSA - VDE
BDV08230CS	8 W	230 ===	100%	- 40°C + 60°C	CE

NOMINAL VOLTAGES DC + 10% - 5%
TOLERANCES: AC + 10% - 15%

The power values are indicative, as they change as a function of magnetic kit used and of the application sector of reference | Other voltages and power absorptions available on demand and for quantities.